





fischer FSP II

The cost-effective chipboard screw

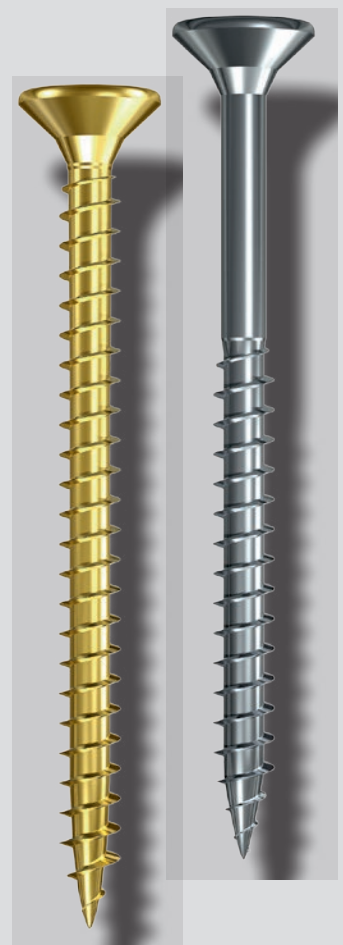

fischer Chipboard screw FSP II


The cost-effective screw for numerous applications

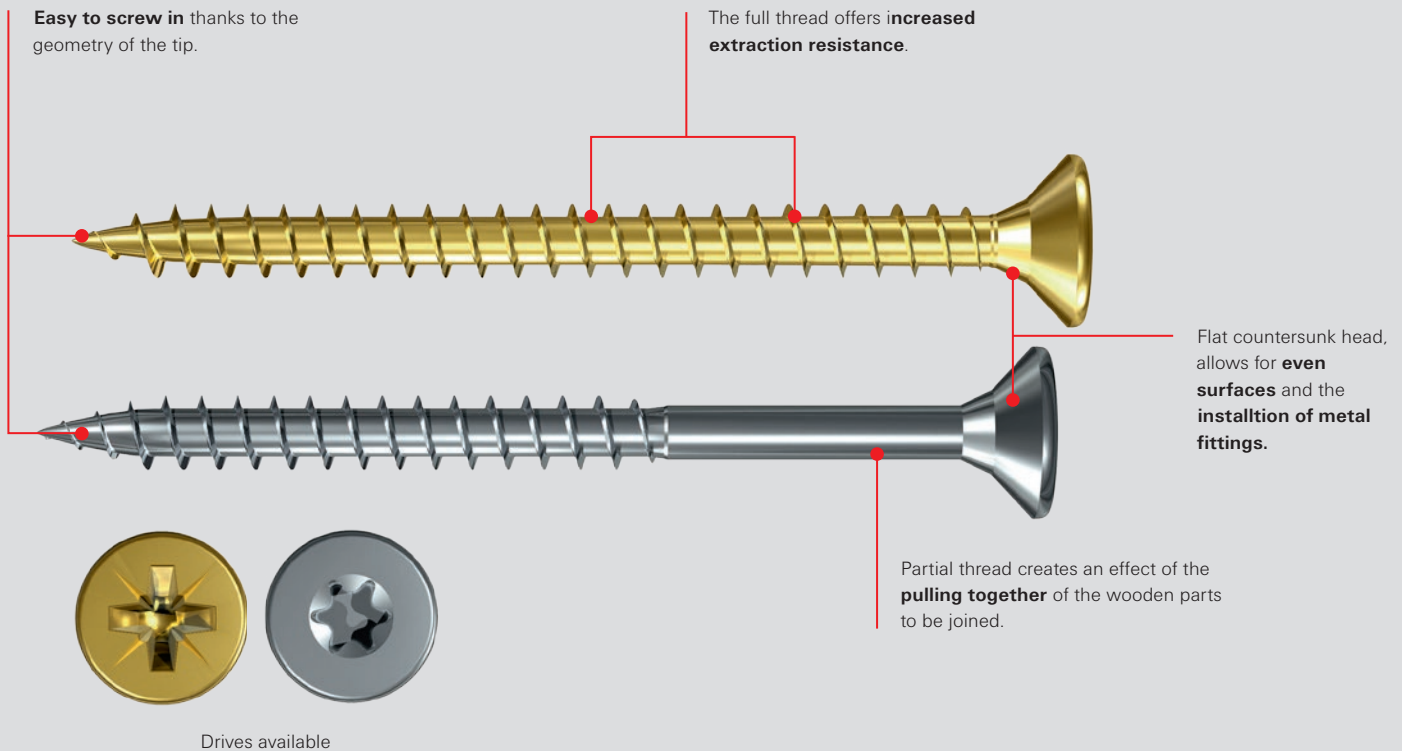

The advantages at a glance

- The chipboard screws can be used universally in all wooden materials.
- The screws offer lasting safety thanks to their CE conformity.
- The countersunk head ensures an appealing surface appearance.
- The partial thread creates an effect of the pulling together of the wooden parts to be joined.
- The full thread offers increased extraction resistance thanks to the longer thread.
- Easy glide coating reduces the screw effort.

Applications

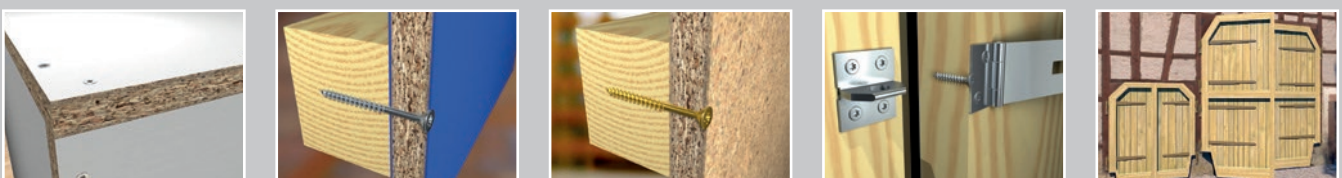


fischer Chipboard screw FSP II

FSP II-CTP BC

- Material: Steel
- Coating: Blue zinc plated

- Drive: TX-Star recess
- Thread: Partial thread
- Screw head: Countersunk head



Diame-ter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
3,5	40	24,0	7,0	TX10	551075	1000	4048962282467
4,0	30	18,0	8,0	TX20	551110	1000	4048962282818
	35	24,0	8,0	TX20	551111	1000	4048962282825
	40	24,0	8,0	TX20	551112	1000	4048962282832
	45	30,0	8,0	TX20	551114	500	4048962282849
	50	30,0	8,0	TX20	551115	500	4048962282856
	60	36,0	8,0	TX20	551116	200	4048962282863
	70	42,0	8,0	TX20	551117	200	4048962282870
4,5	40	24,0	9,0	TX20	551149	500	4048962283198
	45	30,0	9,0	TX20	551150	500	4048962283204
	50	30,0	9,0	TX20	551151	500	4048962283211
	60	36,0	9,0	TX20	551152	200	4048962283228
	70	42,0	9,0	TX20	551153	200	4048962283235
	80	50,0	9,0	TX20	551154	200	4048962283242
5,0	40	24,0	10,0	TX25	551192	500	4048962283624
	45	30,0	10,0	TX25	551193	500	4048962283631
	50	30,0	10,0	TX25	551194	200	4048962283648
	60	36,0	10,0	TX25	551195	200	4048962283655

Diame-ter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
5,0	70	42,0	10,0	TX25	551196	200	4048962283662
	80	50,0	10,0	TX25	551197	200	4048962283679
	90	60,0	10,0	TX25	551198	200	4048962283686
	100	60,0	10,0	TX25	551199	100	4048962283693
	120	72,0	10,0	TX25	551200	100	4048962283709
6,0	40	24,0	12,0	TX30	551247	200	4048962284171
	50	30,0	12,0	TX30	551248	200	4048962284188
	60	36,0	12,0	TX30	551249	200	4048962284195
	70	42,0	12,0	TX30	551250	200	4048962284201
	80	50,0	12,0	TX30	551251	200	4048962284218
	90	60,0	12,0	TX30	551252	200	4048962284225
	100	60,0	12,0	TX30	551253	100	4048962284232
	110	66,0	12,0	TX30	551254	100	4048962284249
	120	72,0	12,0	TX30	551255	100	4048962284256
	140	72,0	12,0	TX30	551257	100	4048962284263
	160	72,0	12,0	TX30	551262	100	4048962284270
	180	72,0	12,0	TX30	551263	100	4048962284287
200	72,0	12,0	TX30	551264	100	4048962284294	

FSP II-CTF BC

- Material: Steel
- Coating: Blue zinc plated

- Drive: TX-Star recess
- Thread: Full thread
- Screw head: Countersunk head



Diame-ter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
3,0	16	12,1	6,0	TX10	551067	1000	4048962282382
	20	16,1	6,0	TX10	551068	1000	4048962282399
	25	21,1	6,0	TX10	551069	1000	4048962282405

Diame-ter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
3,0	30	26,1	6,0	TX10	551070	1000	4048962282412
3,5	16	11,7	7,0	TX10	551091	1000	4048962282627
	20	15,7	7,0	TX10	551092	1000	4048962282634


fischer Chipboard screw FSP II

Diame-ter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
3,5	25	20,7	7,0	TX10	551093	1000	4048962282641
	30	25,7	7,0	TX10	551094	1000	4048962282658
	35	30,7	7,0	TX10	551095	1000	4048962282665
4,0	16	10,5	8,0	TX20	551132	1000	4048962283020
	20	14,5	8,0	TX20	551133	1000	4048962283037
	25	19,5	8,0	TX20	551134	1000	4048962283044
	30	24,5	8,0	TX20	551135	1000	4048962283051
	35	29,5	8,0	TX20	551136	1000	4048962283068
	40	34,5	8,0	TX20	551137	1000	4048962283075
4,5	20	14,7	9,0	TX20	551169	1000	4048962283396

Diame-ter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
4,5	25	19,7	9,0	TX20	551170	1000	4048962283402
	30	24,7	9,0	TX20	551171	1000	4048962283419
	35	29,7	9,0	TX20	551172	500	4048962283426
5,0	20	14,1	10,0	TX25	551213	500	4048962283839
	25	19,1	10,0	TX25	551214	500	4048962283846
	30	24,1	10,0	TX25	551215	500	4048962283853
	35	29,1	10,0	TX25	551216	500	4048962283860
	40	34,1	10,0	TX25	551217	500	4048962283877
6,0	40	32,8	12,0	TX30	551272	200	4048962284362
	50	42,8	12,0	TX30	551273	200	4048962284379

FSP II-CZP BC

- Material: Steel
- Coating: Blue zinc plated
- Drive: Cross drive PZ
- Thread: Partial thread
- Screw head: Countersunk head



Diame-ter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
3,5	40	24,0	7,0	PZ2	551071	1000	4048962282429
4,0	30	18,0	8,0	PZ2	551096	1000	4048962282672
	35	24,0	8,0	PZ2	551097	1000	4048962282689
	40	24,0	8,0	PZ2	551098	1000	4048962282696
	45	30,0	8,0	PZ2	551099	500	4048962282702
	50	30,0	8,0	PZ2	551100	500	4048962282719
	60	36,0	8,0	PZ2	551101	200	4048962282726
	70	42,0	8,0	PZ2	551102	200	4048962282733
4,5	40	24,0	9,0	PZ2	551138	500	4048962283082
	45	30,0	9,0	PZ2	551139	500	4048962283099
	50	30,0	9,0	PZ2	551140	500	4048962283105
	60	36,0	9,0	PZ2	551141	200	4048962283112
	70	42,0	9,0	PZ2	551142	200	4048962283129

Diame-ter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
5,0	40	24,0	10,0	PZ2	551173	500	4048962283433
	45	30,0	10,0	PZ2	551174	500	4048962283440
	50	30,0	10,0	PZ2	551175	200	4048962283457
	60	36,0	10,0	PZ2	551176	200	4048962283464
	70	42,0	10,0	PZ2	551177	200	4048962283471
	80	50,0	10,0	PZ2	551178	200	4048962283488
	90	60,0	10,0	PZ2	551179	200	4048962283495
	100	60,0	10,0	PZ2	551180	100	4048962283501
	120	72,0	10,0	PZ2	551181	100	4048962283518
6,0	50	30,0	12,0	PZ3	551218	200	4048962283884
	60	36,0	12,0	PZ3	551219	200	4048962283891
	70	42,0	12,0	PZ3	551220	200	4048962283907
	80	50,0	12,0	PZ3	551221	200	4048962283914



fischer Chipboard screw FSP II


Diameter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
6,0	90	60,0	12,0	PZ3	551222	200	4048962283921
	100	60,0	12,0	PZ3	551223	100	4048962283938
	110	66,0	12,0	PZ3	551224	100	4048962283945
	120	72,0	12,0	PZ3	551225	100	4048962283952
	130	72,0	12,0	PZ3	551226	100	4048962283969

Diameter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
6,0	140	72,0	12,0	PZ3	551227	100	4048962283976
	150	72,0	12,0	PZ3	551228	100	4048962283983
	160	72,0	12,0	PZ3	551229	100	4048962283990
	180	72,0	12,0	PZ3	551230	100	4048962284003
	200	72,0	12,0	PZ3	551231	100	4048962284010

FSPII-CZF BC

- Material: Steel
- Coating: Blue zinc plated

- Drive: Cross drive PZ
- Thread: Full thread
- Screw head: Countersunk head




Diameter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
3,0	12	8,1	6,0	PZ1	551055	1000	4048962282269
	16	12,1	6,0	PZ1	551056	1000	4048962282276
	20	16,1	6,0	PZ1	551057	1000	4048962282283
	25	21,1	6,0	PZ1	551058	1000	4048962282290
	30	26,1	6,0	PZ1	551059	1000	4048962282306
	35	31,1	6,0	PZ1	551060	1000	4048962282313
	40	36,1	6,0	PZ1	551061	1000	4048962282320
3,5	12	7,7	7,0	PZ2	551076	1000	4048962282474
	16	11,7	7,0	PZ2	551077	1000	4048962282481
	20	15,7	7,0	PZ2	551078	1000	4048962282498
	25	20,7	7,0	PZ2	551079	1000	4048962282504
	30	25,7	7,0	PZ2	551080	1000	4048962282511
	35	30,7	7,0	PZ2	551081	1000	4048962282528
	40	35,7	7,0	PZ2	551082	1000	4048962282535
4,0	16	10,5	8,0	PZ2	551118	1000	4048962282887
	20	14,5	8,0	PZ2	551119	1000	4048962282894
	25	19,5	8,0	PZ2	551120	1000	4048962282900
	30	24,5	8,0	PZ2	551121	1000	4048962282917

Diameter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
4,0	35	29,5	8,0	PZ2	551122	1000	4048962282924
	40	34,5	8,0	PZ2	551123	1000	4048962282931
4,5	20	14,7	9,0	PZ2	551155	1000	4048962283259
	25	19,7	9,0	PZ2	551156	1000	4048962283266
	30	24,7	9,0	PZ2	551157	1000	4048962283273
	35	29,7	9,0	PZ2	551158	500	4048962283280
	40	34,7	9,0	PZ2	551159	500	4048962283297
	45	39,7	9,0	PZ2	551160	500	4048962283303
5,0	20	14,1	10,0	PZ2	551201	500	4048962283716
	25	19,1	10,0	PZ2	551202	500	4048962283723
	30	24,1	10,0	PZ2	551203	500	4048962283730
	35	29,1	10,0	PZ2	551204	500	4048962283747
	40	34,1	10,0	PZ2	551205	500	4048962283754
	45	39,1	10,0	PZ2	551206	500	4048962283761
6,0	40	32,8	12,0	PZ3	551265	200	4048962284300
	50	42,8	12,0	PZ3	551266	200	4048962284317
	60	52,8	12,0	PZ3	551268	200	4048962284324

fischer Chipboard screw FSP II

FSP II-CZP YC

- Material: Steel
- Coating: Yellow zinc plated
- Drive: Cross drive PZ
- Thread: Partial thread
- Screw head: Countersunk head



Diame- ter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
3	40	24,0	6,0	PZ1	551054	1000	4048962282252
3,5	35	24,0	7,0	PZ2	551072	1000	4048962282436
	40	24,0	7,0	PZ2	551073	1000	4048962282443
	45	30,0	7,0	PZ2	551074	1000	4048962282450
4,0	35	24,0	8,0	PZ2	551103	1000	4048962282740
	40	24,0	8,0	PZ2	551104	1000	4048962282757
	45	30,0	8,0	PZ2	551105	500	4048962282764
	50	30,0	8,0	PZ2	551106	200	4048962282771
	55	36,0	8,0	PZ2	551107	200	4048962282788
	60	36,0	8,0	PZ2	551108	200	4048962282795
4,5	70	42,0	8,0	PZ2	551109	200	4048962282801
	40	24,0	9,0	PZ2	551143	500	4048962283136
	45	30,0	9,0	PZ2	551144	500	4048962283143
	50	30,0	9,0	PZ2	551145	500	4048962283150
	60	36,0	9,0	PZ2	551146	200	4048962283167
	70	42,0	9,0	PZ2	551147	200	4048962283174
5,0	80	50,0	9,0	PZ2	551148	200	4048962283181
	35	24,0	10,0	PZ2	551182	500	4048962283525
	40	24,0	10,0	PZ2	551183	500	4048962283532
	45	30,0	10,0	PZ2	551184	500	4048962283549
	50	30,0	10,0	PZ2	551185	200	4048962283556


Diame- ter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
5,0	60	36,0	10,0	PZ2	551186	200	4048962283563
	70	42,0	10,0	PZ2	551187	200	4048962283570
	80	50,0	10,0	PZ2	551188	200	4048962283587
	90	60,0	10,0	PZ2	551189	200	4048962283594
	100	60,0	10,0	PZ2	551190	100	4048962283600
	120	72,0	10,0	PZ2	551191	100	4048962283617
6,0	40	24,0	12,0	PZ3	551232	200	4048962284027
	45	30,0	12,0	PZ3	551233	200	4048962284034
	50	30,0	12,0	PZ3	551234	200	4048962284041
	60	36,0	12,0	PZ3	551235	200	4048962284058
	70	42,0	12,0	PZ3	551236	200	4048962284065
	80	50,0	12,0	PZ3	551237	200	4048962284072
	100	60,0	12,0	PZ3	551238	100	4048962284089
	110	66,0	12,0	PZ3	551239	100	4048962284096
	120	72,0	12,0	PZ3	551240	100	4048962284102
	130	72,0	12,0	PZ3	551241	100	4048962284119
	140	72,0	12,0	PZ3	551242	100	4048962284126
	150	72,0	12,0	PZ3	551243	100	4048962284133
	160	72,0	12,0	PZ3	551244	100	4048962284140
	180	72,0	12,0	PZ3	551245	100	4048962284157
200	72,0	12,0	PZ3	551246	100	4048962284164	

fischer Chipboard screw FSP II

FSP II-CZF YC

- Material: Steel
- Coating: Yellow zinc plated

- Drive: Cross drive PZ
- Thread: Full thread
- Screw head: Countersunk head



Diameter d [mm]	Length l [mm]	Partial thread length l ₀ [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
3,0	16	12,1	6,0	PZ1	551062	1000	4048962282337
	20	16,1	6,0	PZ1	551063	1000	4048962282344
	25	21,1	6,0	PZ1	551064	1000	4048962282351
	30	26,1	6,0	PZ1	551065	1000	4048962282368
	35	31,1	6,0	PZ1	551066	1000	4048962282375
3,5	12	7,7	7,0	PZ2	551083	1000	4048962282542
	16	11,7	7,0	PZ2	551084	1000	4048962282559
	20	15,7	7,0	PZ2	551085	1000	4048962282566
	25	20,7	7,0	PZ2	551086	1000	4048962282573
	30	25,7	7,0	PZ2	551087	1000	4048962282580
	35	30,7	7,0	PZ2	551088	1000	4048962282597
	40	35,7	7,0	PZ2	551089	1000	4048962282603
4,0	16	10,5	8,0	PZ2	551124	1000	4048962282948
	20	14,5	8,0	PZ2	551125	1000	4048962282955
	25	19,5	8,0	PZ2	551126	1000	4048962282962
	30	24,5	8,0	PZ2	551127	1000	4048962282979
	35	29,5	8,0	PZ2	551128	1000	4048962282986
	40	34,5	8,0	PZ2	551129	1000	4048962282993
	45	39,5	8,0	PZ2	551130	500	4048962283006
	50	44,5	8,0	PZ2	551131	500	4048962283013

Diameter d [mm]	Length l [mm]	Partial thread length l ₀ [mm]	Head-φ- [mm]	Drive	Art. No.	Sales unit [Pcs]	GTIN (EAN-Code)
4,5	16	10,7	9,0	PZ2	551161	1000	4048962283310
	20	14,7	9,0	PZ2	551162	1000	4048962283327
	25	19,7	9,0	PZ2	551163	1000	4048962283334
	30	24,7	9,0	PZ2	551164	1000	4048962283341
	35	29,7	9,0	PZ2	551165	500	4048962283358
	40	34,7	9,0	PZ2	551166	500	4048962283365
	45	39,7	9,0	PZ2	551167	500	4048962283372
5,0	20	14,1	10,0	PZ2	551207	500	4048962283778
	25	19,1	10,0	PZ2	551208	500	4048962283785
	30	24,1	10,0	PZ2	551209	500	4048962283792
	35	29,1	10,0	PZ2	551210	500	4048962283808
	40	34,1	10,0	PZ2	551211	500	4048962283815
	60	54,1	10,0	PZ2	551212	200	4048962283822
6,0	40	32,8	12,0	PZ3	551269	200	4048962284331
	50	42,8	12,0	PZ3	551270	200	4048962284348
	60	52,8	12,0	PZ3	551271	200	4048962284355

fischer FIXPERIENCE.

The design and information software suite.



- The modular design program includes engineering software and application modules.
- The software is based on international design standards (ETAG 001 and EC2, such as EC1, EC3 and EC5), including the national application documents. All common force and measurement units are available.
- Incorrect input will be recognized and the software gives tips to get a correct result. This ensures a safe and reliable design every time.
- The graphical display can easily be rotated through 360°, panned, tilted or zoomed as required.
- The 3D display gives a detailed and realistic image.
- The "live update" feature helps to keep the program up to date ensuring you are always working with the latest version.
- Free download and updates at www.fischer.de/fixperience-en

Our service to you.



We are available to you at any time as a reliable partner to offer technical support and advice:

- Our products range from chemical resin systems to steel anchors through to nylon anchors.
- Competence and innovation through own research, development and production.
- Global presence and active sales service in over 100 countries.
- Qualified technical consulting for economical and compliant fastening solutions. Also on-site at the construction site if requested.
- Training sessions, some with accreditation, at your premises or at the fischer ACADEMY.
- Design and construction software for demanding applications.

Regional Presence

U.A.E

fischer FZE (Regional Office)
R/A 07, BA 01 - 04
Jebel Ali Free Zone
Dubai, UAE
P. O. Box 261738
Tel: +971 4 883 7477
Fax: +971 4 883 7476
Email: enquiry@fischer.ae

Abu Dhabi

Tel: +971 2 552 5777
Fax: +971 2 552 6566
Email: enquiry@fischer.ae

State of Qatar

Tel: +974 4036 3100
Fax: +974 4471 0898
Email: qatar@fischer.ae

Kingdom of Saudi Arabia

Tel: +966 13 8140866
Fax: +966 13 8140855
Email: saudi@fischer.ae

State of Kuwait

Tel: +965 2481 8786,
+965 2482 5972
Fax: +965 2481 8385
Email: kuwait@fischer.ae

Kingdom of Bahrain

Tel: +973 17408090
Fax: +973 17404323
Email: bahrain@fischer.ae

Sultanate of Oman

Tel: +968 24445425/26/27/28/30
Fax: +968 24445423
Email: oman@fischer.ae

Pakistan

Tel: +923 01 8266216
Email: pakistan@fischer.ae

Follow us:



www.fischer.ae

fischer 
innovative solutions